




IMPORTANT INSTALLATION INSTRUCTIONS

WARNING: Incorrect installation of this product can lead to serious injury. Aztec² Pads should be installed only by a properly trained bicycle technician.

Your local full service bicycle dealer should be able to perform the installation for you.


- 1** Aztec² Pads are **Curved to match the rim profile**. Install the pads so that the curvature of the pad matches that of the rim.
- 2** Tighten the pad just enough to hold position yet still allow repositioning by hand. Clip out a strip of material from this card to serve as a toe-in gauge. Place the card between the pad and the rim at the at the rear end of the pad. Apply the brake to hold the card in place. Tighten the pad mounting bolt(s) and release the brake. Check for proper adjustment and repeat if necessary. There should be a gap of about 1-2mm between the rear of the pad and the rim when the front of the pad is just touching the rim.

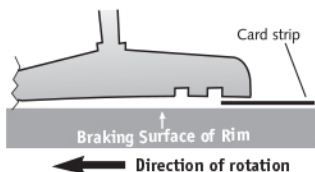

- 3** **IMPORTANT: Replace pads when grooves are worn flush.**


Aztec² pads use a specially developed braking compound that is exceptionally hard wearing. The chevron grooves in the pad surface also serve as wear indicators.

Replace the pads when the grooves are worn flush with the pad surface.

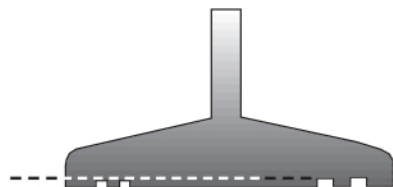

GUARANTEED PERFORMANCE

Great care has gone into the design, development and choice of materials used in the manufacture of Aztec² Pads. If you are dissatisfied in any way with your Pads, please return them to our Customer Service Department with a brief description of your experience. Please also include date and location of your purchase where possible.

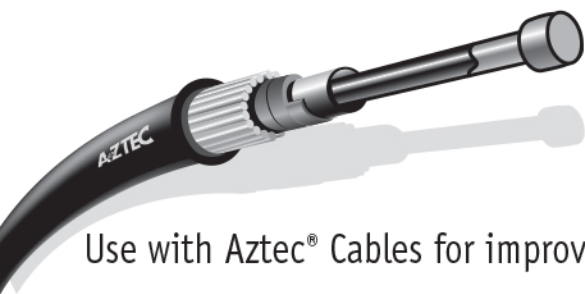

Use with Aztec[®] Cables for improved braking performance.

This warranty applies only in the USA and is limited to the actual value of the pads. Costs of installation or any other indirect costs arising from the use of the pads are specially excluded.



Revolution Cycle Works Company
PO Box 1255
Charlestown RI, 02813
Made in Taiwan
www.revcycleworks.com